


Wiring diagram 接线图



Label 铭牌

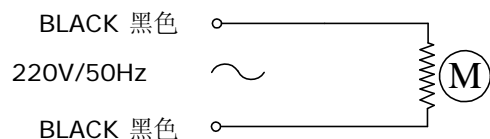

SPECIFICATION 规格说明

MOTOR 电机型式	YGF Series Cross Flow Motors YGF 贯流风机
MOTOR TYPE 电机型号	YGF60-183
VOLTAGE 额定电压 (V)	220
FREQUENCY 频率 (Hz)	50
INPUT POWER 输入功率 (W)	21.8
CURRENT 电流 (A)	0.20
SPEED 负载转速 (r/min)	2100±150
FAN BLADES 负载风叶	60-183
ROTATION 旋转方向	CW (looking towards the shaft 从轴伸端视去逆时针方向)
AIRFLOW DIRECTION 风向	Blowing (沿出风口平行吹出)
MOTOR PROTECTION 电机保护方式	Impedance protection 阻抗保护
INSULATION CLASS 绝缘等级	Class B B级绝缘
TEMPERATURE RISE 温升	95K max (with load) 负载温升不超过95K
PROTECTION CLASS 防护等级	/
OPERATING TYPE 工作定额	S1 连续工作制
MOUNTING TYPE 安装方式	Vertical 水平安装
AMBIENT TEMPERATURE 适用环境温度	-25°C +50°C
BEARINGS 轴承型式	Sleeve bearings 含油轴承
ELECTRICAL CONNECTION 电源线	RV-90 2C 0.75mm ² lead wire 470-490mm free length 电源线长470-490mm, 型号: RV-90 2C 0.75mm ²
HI-POT TEST 耐压测试	1800V/1s I _{leakage} <= 0.7mA 1800V历时1秒, 泄漏电流 <= 0.7mA
WEIGHT PER UNIT 单个电机净重	0.96kg
PACKING 包装	20PCS/CTN 20台/箱

REV.	DESCRIPTION	APPROVED	DATE	DECIMAL	TOLERANCE	SIGN	DATE	TITLE	
				X	±0.5	DRN.BY	01/11/2017	YGF60-183	
				X.X	±0.25	CHD.BY			
				X.XX	±0.15	ENG.BY			
				ANGLE	±3°	APP.BY			
								PROJECTION	A4
									SCALE:
									SHEET: 1 of